


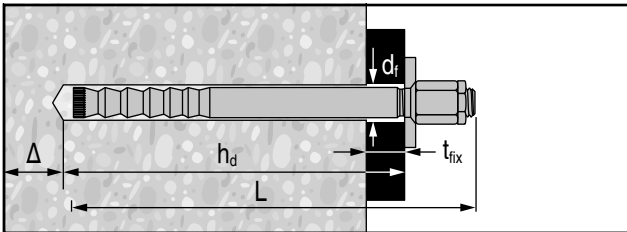







HIT-HY 200
HIT-HY 200 V3

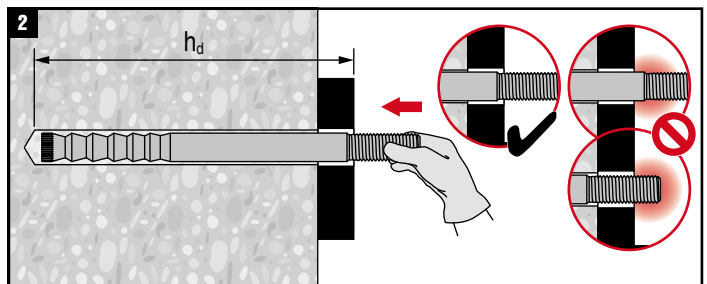

 -10°C...40°C / 14°F...104°F					 max 3°			
HAS-D	d _f [mm]	t _{fix} [mm]	d ₀ 	h _d [mm]	Δ [mm]	L _t [mm]	SW 	T _{inst} [Nm] 
M12 x 'L'	16	12...390	14	L - 28	≥ 28	79 + 0.6*t _{fix}	18/19*	30
M16 x 'L'	20	16...390	18	L - 35	≥ 36	108 + 0.6*t _{fix}	24	50
M20 x 'L'	26	20...390	24	L - 48	≥ 48	144 + 0.6*t _{fix}	30	80

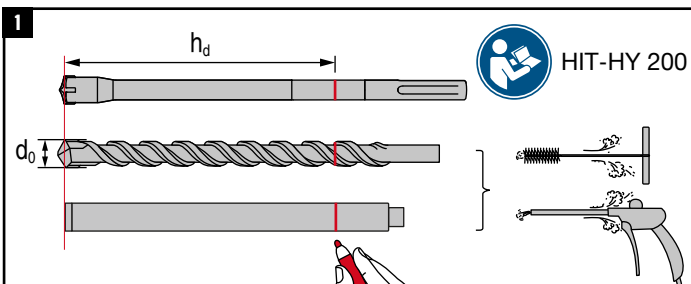

h_d: 100 ... 250 mm

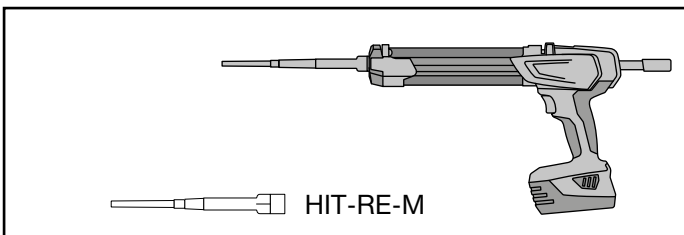

h_d: 100 ... 600 mm

